

Автомобильные реле серии FRL-274 40A Технические характеристики

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	

Единый адрес для всех регионов: fst@nt-rt.ru || www.fujitsu.nt-rt.ru

HIGH POWER RELAY


1 POLE—40 A

(FOR AUTOMOTIVE APPLICATIONS)

FRL-274 (40A TYPE) SERIES

■ FEATURES

- High current switching and carry by using new conductive materials.
- Suitable for automotive applications such as ABS, power assisted steering, etc.
- High heat resistance
Designed for use in high ambient temperature, such as engine compartment, and able to carry continuous current of 20 A in +125°C.
- New contact material
New contact material formulation which is resistant to welding.



■ ORDERING INFORMATION

[Example] $\frac{\text{FRL-274}}{\text{(a)}} \frac{\text{N}}{\text{(b)}} \frac{\text{D012}}{\text{(c)}} \frac{\text{/ 81}}{\text{(d)}} \frac{\text{C}}{\text{(e)}} \frac{\text{Y}}{\text{(f)}} \frac{\text{-01A}}{\text{(g)}} \frac{\text{-001}}{\text{(h)}}$

(a)	Series Name	FRL-274: FRL-274 Series
(b)	Enclosure	N : Plastic sealed type
(c)	Nominal Voltage	D012 : 12 VDC
(d)	Carrying Current	81 : 40 A type
(e)	Contact Arrangement	A : 1 form A C : 1 form C
(f)	Contact Material	Y : Silver-tin oxide
(g)	Cover Terminal	01A : w/cover, wide terminal width
(h)	Custom Designation	To be assigned custom specification

FRL-274 (40A TYPE) SERIES

■ SPECIFICATIONS

Item		Specifications	
Contact	Arrangement	1 form A , 1 form C	
	Material	Silver-tin oxide	
	Voltage Drop (resistance)	Maximum 300 mV initial (at 5 Amps, 12 VDC) Maximum 500 mV after durability test (at 5 Amps, 12 VDC)	
	Rating	N.O.	12 VDC 40 A (resistive load)
		N.C.	12 VDC 15 A (resistive load)
	Gap	0.4 mm gap	
	Maximum Carrying Current	30 A continuous, 40 A/10 minutes (at 25°C 100% rated coil voltage) 20 A continuous, 40 A/10 minutes (at 125°C 100% rated coil voltage)	
	Max. Switching Frequency	Mechanical: 18,000 operations/hour Electrical: 1,800 operations/hour	
Minimum Switching Load ^(*) (reference)	0.6 W minimum (50 mA minimum)		
Coil	Power Consumption	Approximately 0.87 W (rated voltage at 20°C)	
	Coil Temperature Rise	Approximately 75 °C. (rated voltage at 20°C)	
	Operating Temperature	-40°C to +125°C (no frost)	
	Storage Temperature	-40°C to +125°C (no frost)	
Insulation	Resistance	Minimum 100 MΩ (at 500 VDC)	
	Dielectric Strength	AC 500 V 1 minimum	
Time Value	Operate (at nominal voltage)	Maximum 10 ms	
	Release (at nominal voltage)	Maximum 5 ms	
Life	Mechanical	10 × 10 ⁶ operations minimum	
	Electrical	250 × 10 ³ operations minimum	
Other	Vibration Resistance	10 to 55 Hz (double amplitude of 1.5 mm)	
	Shock Resistance	Misoperation	100 m/s ²
		Endurance	1,000 m/s ²
	Weight	Approximately 20 g	

*1 Values when switching a resistive load at normal room temperature and humidity and in a clean environment. The minimum applicable load varies with the switching frequency and operating environment.

FRL-274 (40A TYPE) SERIES

COIL DATA CHART


MODEL	Nominal voltage	Coil resistance ($\pm 10\%$) (at 20°C)	Must operate voltage	Thermal resistance
FRL-274ND012/81AY-01A FRL-274ND012/81CY-01A	12 VDC	165 Ω	6.3 VDC (at 20°C) 8.0 VDC (at 85°C)	73°C/W

CHARACTERISTIC DATA


1. LIFE TEST (EXAMPLE)

- Test item
16 VDC, 40 A
Motor lock
 2×10^5 operations


- Test circuit




- Circuit wave form




- Shift of pick-up and drop-out voltage

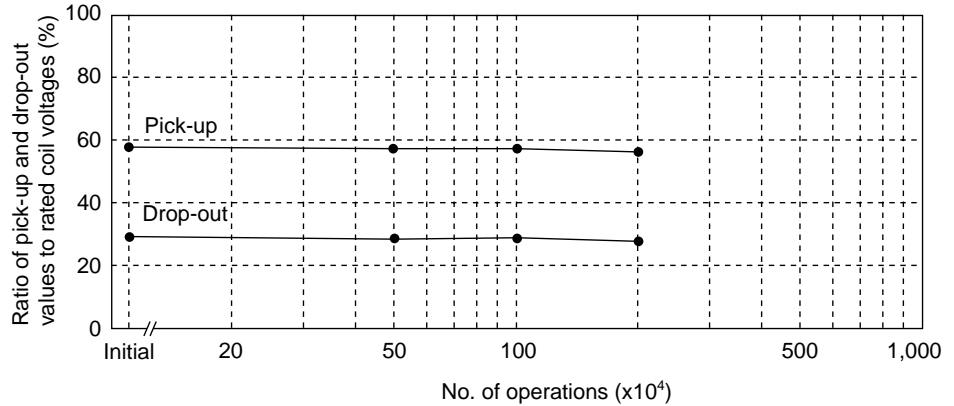

- Shift of contact resistance


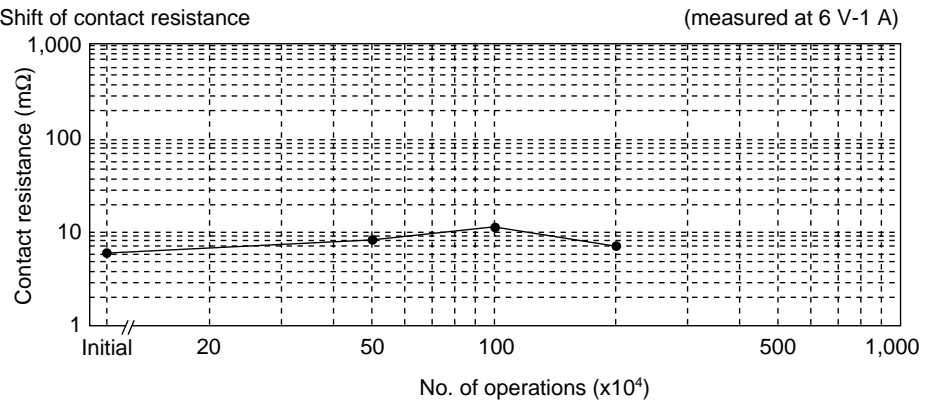


2. MAXIMUM BREAK CAPACITY

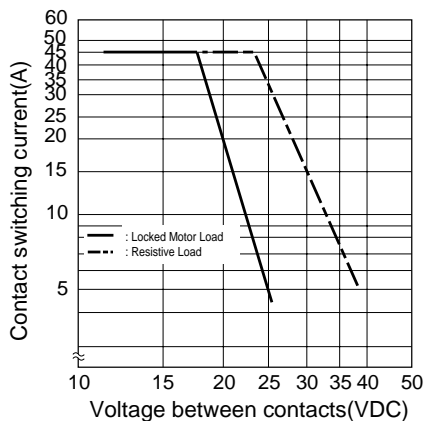




3. OPERATING COIL VOLTAGE (EXAMPLE)

- Test circuit

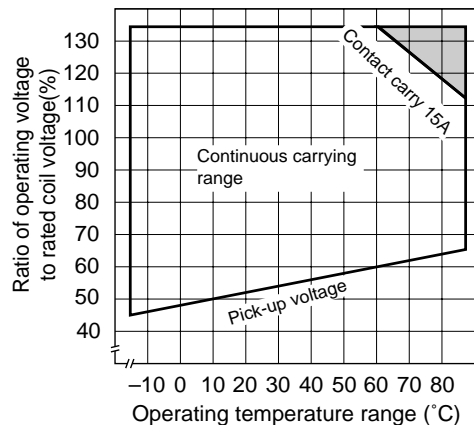


FRL-274 (40A TYPE) SERIES

REFERENCE DATA

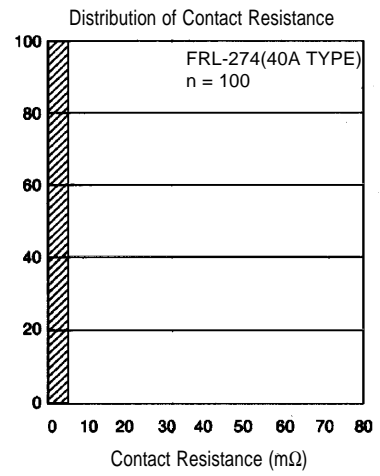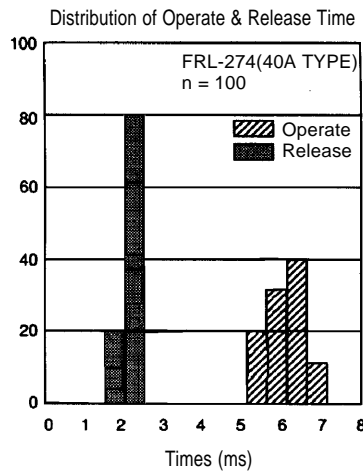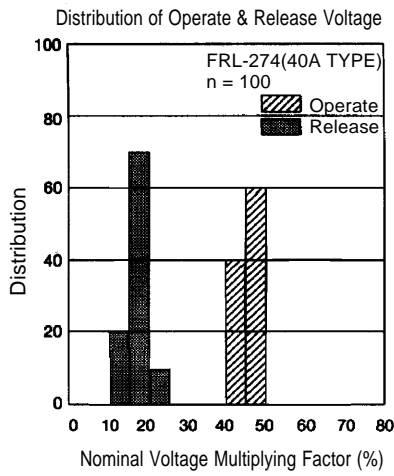


DIMENSIONS

Dimensions

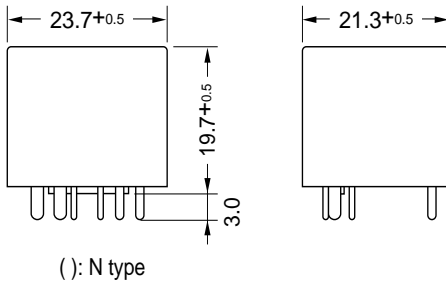

PC board mounting hole layout (BOTTOM VIEW)


Standard terminal width




Note : Tolerance ± 0.1 mm

Schematics (BOTTOM VIEW)


• 1 from C



• 1 from A



Tube carrier

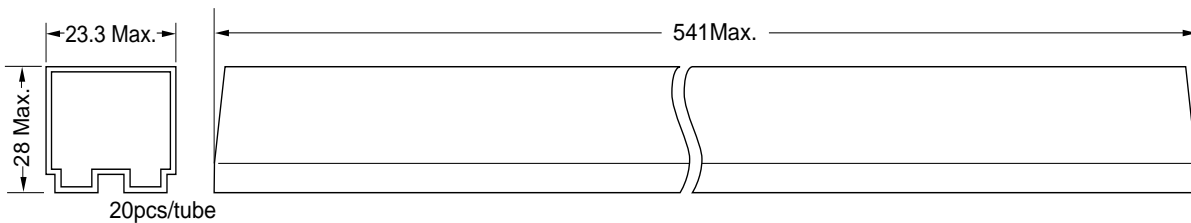

Unit: mm

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	

Единый адрес для всех регионов: fst@nt-rt.ru || www.fujitsu.nt-rt.ru