

# Субминиатюрные реле 3-го поколения серии FBR12

## Технические характеристики

<b>Архангельск</b> (8182)63-90-72	<b>Ижевск</b> (3412)26-03-58	<b>Магнитогорск</b> (3519)55-03-13	<b>Пермь</b> (342)205-81-47	<b>Сургут</b> (3462)77-98-35
<b>Астана</b> (7172)727-132	<b>Иркутск</b> (395)279-98-46	<b>Москва</b> (495)268-04-70	<b>Ростов-на-Дону</b> (863)308-18-15	<b>Тверь</b> (4822)63-31-35
<b>Астрахань</b> (8512)99-46-04	<b>Казань</b> (843)206-01-48	<b>Мурманск</b> (8152)59-64-93	<b>Рязань</b> (4912)46-61-64	<b>Томск</b> (3822)98-41-53
<b>Барнаул</b> (3852)73-04-60	<b>Калининград</b> (4012)72-03-81	<b>Набережные Челны</b> (8552)20-53-41	<b>Самара</b> (846)206-03-16	<b>Тула</b> (4872)74-02-29
<b>Белгород</b> (4722)40-23-64	<b>Калуга</b> (4842)92-23-67	<b>Нижний Новгород</b> (831)429-08-12	<b>Санкт-Петербург</b> (812)309-46-40	<b>Тюмень</b> (3452)66-21-18
<b>Брянск</b> (4832)59-03-52	<b>Кемерово</b> (3842)65-04-62	<b>Новокузнецк</b> (3843)20-46-81	<b>Саратов</b> (845)249-38-78	<b>Ульяновск</b> (8422)24-23-59
<b>Владивосток</b> (423)249-28-31	<b>Киров</b> (8332)68-02-04	<b>Новосибирск</b> (383)227-86-73	<b>Севастополь</b> (8692)22-31-93	<b>Уфа</b> (347)229-48-12
<b>Волгоград</b> (844)278-03-48	<b>Краснодар</b> (861)203-40-90	<b>Омск</b> (3812)21-46-40	<b>Симферополь</b> (3652)67-13-56	<b>Хабаровск</b> (4212)92-98-04
<b>Вологда</b> (8172)26-41-59	<b>Красноярск</b> (391)204-63-61	<b>Орел</b> (4862)44-53-42	<b>Смоленск</b> (4812)29-41-54	<b>Челябинск</b> (351)202-03-61
<b>Воронеж</b> (473)204-51-73	<b>Курск</b> (4712)77-13-04	<b>Оренбург</b> (3532)37-68-04	<b>Сочи</b> (862)225-72-31	<b>Череповец</b> (8202)49-02-64
<b>Екатеринбург</b> (343)384-55-89	<b>Липецк</b> (4742)52-20-81	<b>Пенза</b> (8412)22-31-16	<b>Ставрополь</b> (8652)20-65-13	<b>Ярославль</b> (4852)69-52-93
<b>Иваново</b> (4932)77-34-06	<b>Киргизия</b> (996)312-96-26-47	<b>Казахстан</b> (772)734-952-31	<b>Таджикистан</b> (992)427-82-92-69	

Единый адрес для всех регионов: [fst@nt-rt.ru](mailto:fst@nt-rt.ru) || [www.fujitsu.nt-rt.ru](http://www.fujitsu.nt-rt.ru)


# MINIATURE RELAY

## 2 POLES—1 to 2 A (FOR SIGNAL SWITCHING)

### FBR12 SERIES

#### ■ FEATURES

- Super miniature size: 0.2 inch × 0.1 inch grid, 12 pin DIP  
Up to 50% less volume and board area than previous generation telecom relay.
- Slim type for high density mounting
- Conforms to Bellcore TR-NWT-001089 and FCC Part 68 requirements
- UL recognized and CSA certified
- Low power consumption
- Conforms to IEC 950 (W type only)
  - 2.5 mm clearance and creepage between coil and contacts
  - 5000 V surge strength between coil and contacts (2x10 $\mu$ s surge wave)
  - 2000 Vrms dielectric strength between coil and contacts
  - UL 1950 and IEC950 (approval in process)

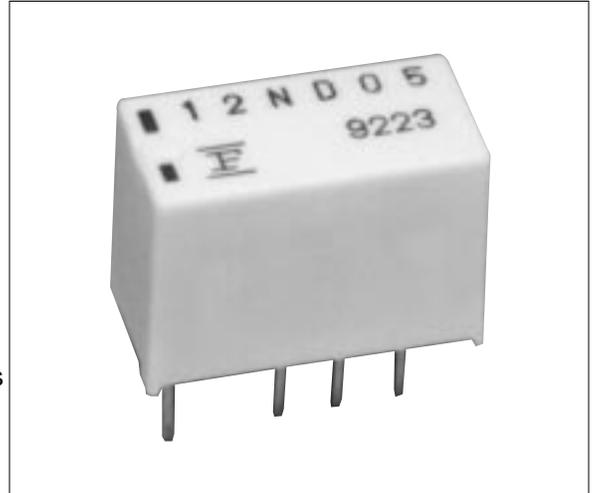

#### ■ ORDERING INFORMATION

[Example] FBR12 N D 12 -P -\*\* (-CSA)  
 (a) (b) (c) (d) (e) (f) (g)

(a)	Series Name	FBR12 : FBR12 Series
(b)	Enclosure & Coil Power	N : Standard (plastic sealed type) W : High dielectric strength type (plastic sealed type) H : High sensitivity type
(c)	Coil Type	D : DC coil
(d)	Nominal Voltage	Refer to the COIL DATA CHART
(e)	Contact Material	Nil : Gold-overlay silver-nickel -P : Gold-overlay silver-palladium
(f)	Custom Designation	To be assigned custom specification
(g)	CSA Standard	-CSA : UL114 + CSA recognized -CSA : UL1950 + CSA (under application)

Note: The designation name is stamped on the top of the relay case as follows:

(Example) Designation ordered: FBR12ND05

Stamp: 12ND05

#### ■ SAFETY STANDARD AND FILE NUMBERS

UL508, 1950, 114 (File No. E63615)

C22.2 No. 0, No. 14 (File No. LR40304 or LR64026)

Nominal coil voltage	Contact rating
3 to 24 VDC	0.5 A 125 VDC resistive
	2 A 30 VDC resistive
	0.3 A 110 VAC resistive

# FBR12 SERIES

## ■ SPECIFICATIONS

Item		Standard (Gold-overlay silver-nickel)		-P type (Gold-overlay silver-palladium)		
		Standard	High dielectric strength type	Standard	High dielectric strength type	
Contact	Arrangement	2 form C (DPDT)				
	Material	Gold-overlay silver-nickel		Gold-overlay silver-palladium		
	Style	Bifurcated				
	Resistance (initial)	Maximum 100 mΩ (at 0.1 A 6 VDC)				
	Rating (resistive)	0.5 A 125 VAC or 1 A 30 VDC				
	Maximum Carrying Current	2 A (at 20°C)				
	Maximum Switching Power	62.5 VA or 60 W				
	Max. Switching Voltage*1	250 VAC or 220 VDC				
	Maximum Switching Current	2 A				
	Minimum Switching Load*2	10 μA 10 VDC (reference)				
	Capacitance (at 10 kHz)	Approximately 1.0 pF (between open contacts, adjacent contacts ) Approximately 1.0 pF (between coil and contacts)				
Coil	Nominal power (at 20°C)	Approximately 0.14 to 0.2 W	Approximately 0.23 to 0.25 W	Approximately 0.14 to 0.2 W	Approximately 0.23 to 0.25 W	
	Operate power (at 20°C)	Approximately 0.08 to 0.112 W	Approximately 0.13 to 0.14 W	Approximately 0.08 to 0.112 W	Approximately 0.13 to 0.14 W	
	Thermal Resistance at Continuous Thermal Load	Approximately 115°C/W				
	Operating Temperature	-40°C to +85°C (no frost) (refer to the CHARACTERISTIC DATA)				
	Operating Humidity	45 to 85%RH				
Time Value	Operate (at nominal voltage)	Maximum 4 msec.				
	Release (at nominal voltage)	Maximum 4 msec.				
	Max. Switching Frequency	Mechanical 3 Hz or electrical 0.5 Hz (at contact rating)				
Insulation	Resistance (initial)	Minimum 1000 MΩ (at 500 VDC)				
	Dielectric Strength	between open contacts	1,500 VAC			
		adjacent contacts	1,000 VAC 1 minimum			
		between coil and contacts	1,500 VAC 1 min.	2,000 VAC 1 min.	1,500 VAC 1 min.	2,000 VAC 1 min.
Surge Strength	between open contacts, adjacent contacts	2,500 V				
	between coil and contacts	2,500 V 2 × 10 μs	5,000 V 2 × 10 μs	2,500 V 2 × 10 μs		5,000 V 2 × 10 μs
Life	Mechanical		1 × 10 <sup>8</sup> operations minimum			
	Electrical (at contact rating)	DC	2 × 10 <sup>5</sup> operations minimum		5 × 10 <sup>5</sup> operations minimum	
		AC	1 × 10 <sup>5</sup> operations minimum		200 × 10 <sup>3</sup> operations minimum	
Other	Vibration Resistance	Misoperation	10 to 55 Hz (double amplitude of 3.3 mm)			
		Endurance	10 to 55 Hz (double amplitude of 5.0 mm)			
	Shock Resistance	Misoperation	500 m/s <sup>2</sup> (11 ± 1 ms)			
		Endurance	1,000 m/s <sup>2</sup> (6 ± 1 ms)			
	Weight	Approx. 1.5 g	Approx. 1.9 g	Approx. 1.5 g	Approx. 1.9 g	

\*1 If the switching voltage exceeds the rated contact voltage, reduce the current. The current values vary according to the type of load.

\*2 Values when switching a resistive load at normal room temperature and humidity and in a clean environment. The minimum switching load varies with the switching frequency and operation environment.

# FBR12 SERIES

## ■ SPECIFICATIONS

Item		High Sensitive Type		
		Standard (Gold-overlay silver-nickel)	-P type (Gold-overlay silver-palladium)	
Contact	Arrangement	2 form C (DPDT)		
	Material	Gold-overlay silver-nickel	Gold-overlay silver-palladium	
	Style	Bifurcated		
	Resistance (initial)	Maximum 100 mΩ (at 0.1 A 6 VDC)		
	Rating (resistive)	0.3 A 125 VAC or 1 A 30 VDC		
	Maximum Carrying Current	2 A (at 20°C)		
	Maximum Switching Power	62.5 VA or 30 W		
	Max. Switching Voltage*1	250 VAC or 220 VDC		
	Maximum Switching Current	2 A		
	Minimum Switching Load*2	10m VDC - 10μ A		
	Capacitance (at 10 kHz)	Approximately 1.0 pF (between open contacts, adjacent contacts ) Approximately 1.0 pF (between coil and contacts)		
Coil	Nominal power (at 20°C)	Approximately 50mW		
	Operate power (at 20°C)	Approximately 40m W		
	Operating Temperature	-40°C to +70°C (no frost) (refer to the CHARACTERISTIC DATA)		
	Operating Humidity	45 to 85%RH		
Time Value	Operate (at nominal voltage)	Maximum 5 msec.		
	Release (at nominal voltage)	Maximum 5 msec.		
Insulation	Resistance (initial)	Minimum 1000 MΩ (at 500 VDC)		
	Dielectric Strength	between open contacts	750 VAC	
		adjacent contacts	1 minute	
		between coil and contacts	1,500 VAC 1 minutes	
	Surge Strength	between open contacts, adjacent contacts	1,500 V 10 × 700 μs	
between coil and contacts		2,500 V 2 × 10 μs		
Life	Mechanical	1 × 10 <sup>8</sup> operations minimum		
	Electrical (at contact rating)	DC	2 × 10 <sup>5</sup> operations minimum	5 × 10 <sup>5</sup> operations minimum
		AC	1 × 10 <sup>5</sup> operations minimum	200 × 10 <sup>3</sup> operations minimum
Other	Vibration Resistance	Misoperation	10 to 55 Hz (double amplitude of 3.3` mm)	
		Endurance	10 to 55 Hz (double amplitude of 5.0 mm)	
	Shock Resistance	Misoperation	500 m/s <sup>2</sup> (11±1 ms)	
		Endurance	1,000 m/s <sup>2</sup> ( 6 ±1 ms)	
	Weight	Approx. 1.9 g		

\*1 If the switching voltage exceeds the rated contact voltage, reduce the current. The current values vary according to the type of load.

\*2 Values when switching a resistive load at normal room temperature and humidity and in a clean environment. The minimum switching load varies with the switching frequency and operation environment.

# FBR12 SERIES

## COIL DATA CHART

### 1. STANDARD

MODEL		Nominal voltage	Coil resistance ( $\pm 10\%$ )	Nominal current (at nominal voltage) approx.	Must operate voltage <sup>*1</sup>	Must operate voltage <sup>*1</sup>	Nominal power	Operate power	Coil temperature rise
Standard	-P type								
FBR12ND03	FBR12ND03-P	3 VDC	64.3 $\Omega$	46 mA	75% max. of nominal voltage	10% min. of nominal voltage	Approx. 0.14 W (at nominal voltage)	Approx. 0.08 W Max.	Approx. 20 deg Max. (at nominal voltage)
FBR12ND04	FBR12ND04-P	4.5 VDC	145 $\Omega$	31 mA					
FBR12ND05	FBR12ND05-P	5 VDC	178 $\Omega$	28 mA					
FBR12ND06	FBR12ND06-P	6 VDC	257 $\Omega$	23 mA					
FBR12ND09	FBR12ND09-P	9 VDC	579 $\Omega$	15 mA					
FBR12ND12	FBR12ND12-P	12 VDC	1,028 $\Omega$	11 mA					
FBR12ND24	FBR12ND24-P	24 VDC	2,880 $\Omega$	8 mA			0.2 W	0.112 W	30 deg

\*1: Specified values are subject to pulse wave voltage.

Note: All values in the table are measured at 20°C.

### 2. HIGH DIELECTRIC STRENGTH

MODEL		Nominal voltage	Coil resistance ( $\pm 10\%$ )	Nominal current (at nominal voltage) approx.	Must operate voltage <sup>*1</sup>	Must release voltage <sup>*1</sup>	Nominal power	Operate power	Coil temperature rise
Standard	-P type								
FBR12WD03	FBR12WD03-P	3 VDC	39 $\Omega$	77 mA	75% max. of nominal voltage	10% min. of nominal voltage	Approx. 0.23 W (at nominal voltage)	Approx. 0.13 W Max.	Approx. 30 deg (at nominal voltage)
FBR12WD04	FBR12WD04-P	4.5 VDC	88 $\Omega$	51 mA					
FBR12WD05	FBR12WD05-P	5 VDC	108 $\Omega$	46 mA					
FBR12WD06	FBR12WD06-P	6 VDC	156 $\Omega$	38 mA					
FBR12WD09	FBR12WD09-P	9 VDC	352 $\Omega$	25 mA					
FBR12WD12	FBR12WD12-P	12 VDC	626 $\Omega$	19 mA					
FBR12WD24	FBR12WD24-P	24 VDC	2,304 $\Omega$	10 mA			0.25 W	0.14 W	33 deg

\*1: Specified values are subject to pulse wave voltage.

Note: All values in the table are measured at 20°C.

### 3. HIGH SENSITIVITY TYPE


MODEL		Nominal voltage	Coil resistance ( $\pm 10\%$ )	Must operate voltage <sup>*1</sup>	Must release voltage <sup>*1</sup>	Nominal power	Operate power	Coil temperature rise
Standard	-P type							
FBR12HD03	FBR12HD03-P	3 VDC	180 $\Omega$	80% max. of nominal voltage	10% min. of nominal voltage	Approx. 0.05 W (at nominal voltage)	Approx. 0.04 W Max.	Approx. 4 deg (at nominal voltage)
FBR12HD04	FBR12HD04-P	4.5 VDC	405 $\Omega$					
FBR12HD05	FBR12HD05-P	5 VDC	500 $\Omega$					
FBR12HD06	FBR12HD06-P	6 VDC	720 $\Omega$					
FBR12HD09	FBR12HD09-P	9 VDC	1,620 $\Omega$					
FBR12HD12	FBR12HD12-P	12 VDC	2,880 $\Omega$					

\*1: Specified values are subject to pulse wave voltage.


Note: All values in the table are measured at 20°C.

## CHARACTERISTIC DATA


Range of operation temperature and voltage

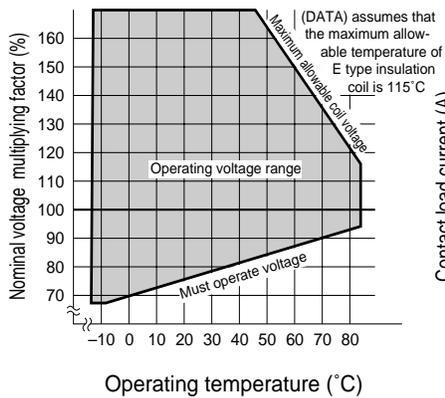

Maximum switching capacity

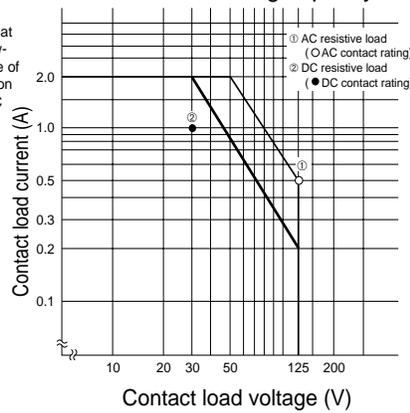


Life curve

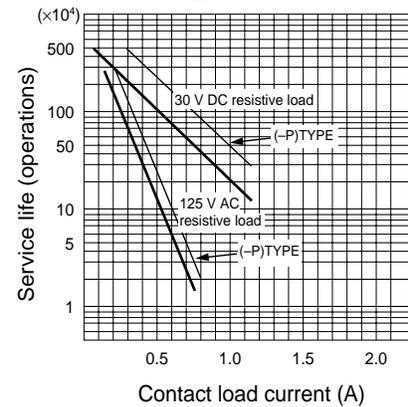


## REFERENCE DATA


Distribution of operate and release voltage

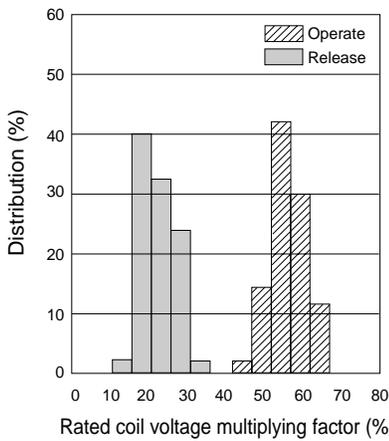

Distribution of operate and release time

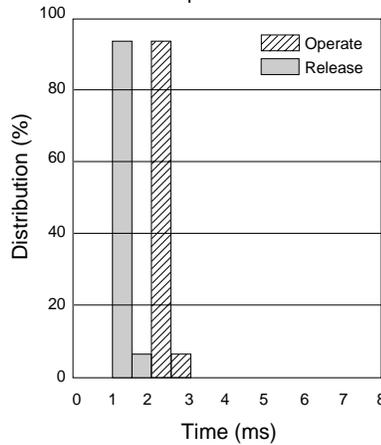


Distribution of contact resistance

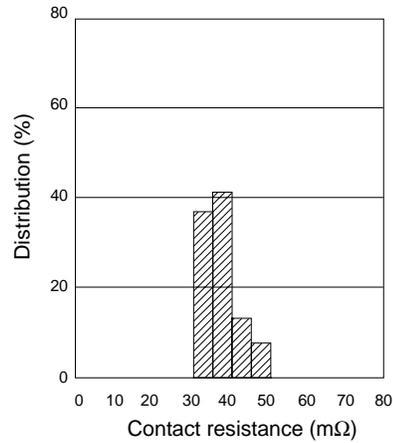


## DIMENSIONS


●Dimensions

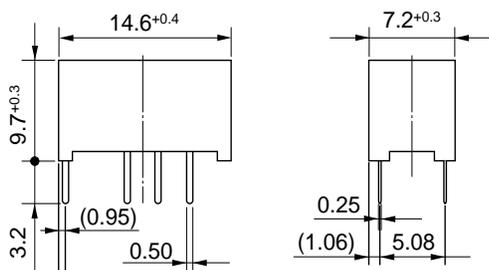


●Schematic (BOTTOM VIEW)



●PC board mounting hole layout (BOTTOM VIEW)

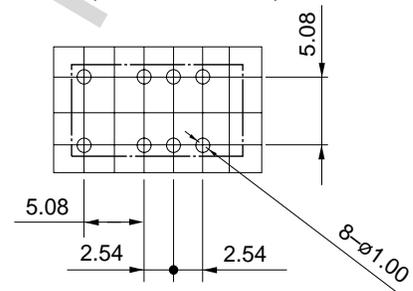

●Tube carrier

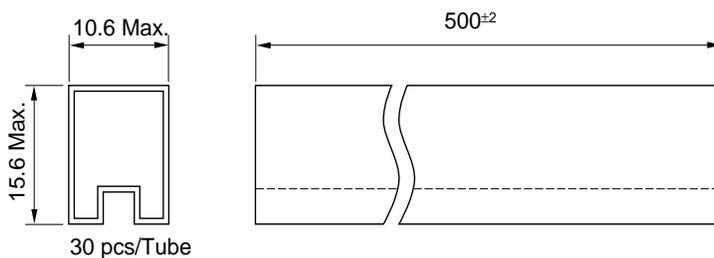

Unit: mm

<b>Архангельск (8182)63-90-72</b>	<b>Ижевск (3412)26-03-58</b>	<b>Магнитогорск (3519)55-03-13</b>	<b>Пермь (342)205-81-47</b>	<b>Сургут (3462)77-98-35</b>
<b>Астана (7172)727-132</b>	<b>Иркутск (395)279-98-46</b>	<b>Москва (495)268-04-70</b>	<b>Ростов-на-Дону (863)308-18-15</b>	<b>Тверь (4822)63-31-35</b>
<b>Астрахань (8512)99-46-04</b>	<b>Казань (843)206-01-48</b>	<b>Мурманск (8152)59-64-93</b>	<b>Рязань (4912)46-61-64</b>	<b>Томск (3822)98-41-53</b>
<b>Барнаул (3852)73-04-60</b>	<b>Калининград (4012)72-03-81</b>	<b>Набережные Челны (8552)20-53-41</b>	<b>Самара (846)206-03-16</b>	<b>Тула (4872)74-02-29</b>
<b>Белгород (4722)40-23-64</b>	<b>Калуга (4842)92-23-67</b>	<b>Нижний Новгород (831)429-08-12</b>	<b>Санкт-Петербург (812)309-46-40</b>	<b>Тюмень (3452)66-21-18</b>
<b>Брянск (4832)59-03-52</b>	<b>Кемерово (3842)65-04-62</b>	<b>Новокузнецк (3843)20-46-81</b>	<b>Саратов (845)249-38-78</b>	<b>Ульяновск (8422)24-23-59</b>
<b>Владивосток (423)249-28-31</b>	<b>Киров (8332)68-02-04</b>	<b>Новосибирск (383)227-86-73</b>	<b>Севастополь (8692)22-31-93</b>	<b>Уфа (347)229-48-12</b>
<b>Волгоград (844)278-03-48</b>	<b>Краснодар (861)203-40-90</b>	<b>Омск (3812)21-46-40</b>	<b>Симферополь (3652)67-13-56</b>	<b>Хабаровск (4212)92-98-04</b>
<b>Вологда (8172)26-41-59</b>	<b>Красноярск (391)204-63-61</b>	<b>Орел (4862)44-53-42</b>	<b>Смоленск (4812)29-41-54</b>	<b>Челябинск (351)202-03-61</b>
<b>Воронеж (473)204-51-73</b>	<b>Курск (4712)77-13-04</b>	<b>Оренбург (3532)37-68-04</b>	<b>Сочи (862)225-72-31</b>	<b>Череповец (8202)49-02-64</b>
<b>Екатеринбург (343)384-55-89</b>	<b>Липецк (4742)52-20-81</b>	<b>Пенза (8412)22-31-16</b>	<b>Ставрополь (8652)20-65-13</b>	<b>Ярославль (4852)69-52-93</b>
<b>Иваново (4932)77-34-06</b>	<b>Киргизия (996)312-96-26-47</b>	<b>Казахстан (772)734-952-31</b>	<b>Таджикистан (992)427-82-92-69</b>	

Единый адрес для всех регионов: [fst@nt-rt.ru](mailto:fst@nt-rt.ru) || [www.fujitsu.nt-rt.ru](http://www.fujitsu.nt-rt.ru)