

Сигнальные реле серии FBR211

Технические характеристики

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	

MINIATURE RELAY

1 POLE—1 to 2 A (FOR SIGNAL SWITCHING) FBR211 SERIES

RoHS Compliant

■ FEATURES

- 2 A maximum carrying current
Capable of 2 A maximum continuous carrying current in the contact
- Superior reliability gold-overlay contacts
P type: Gold-overlay silver-palladium contacts
- International terminal pitch of one inch grid terminal layout
- High sensitivity, low power dissipation types also available
Standard types: 0.45 W (A or B type)
High sensitivity types: 0.2 W (C or E type)
- Conforms to FCC 68.302 (high dielectric strength type)
- UL recognized (File number E63615)
- CSA recognized (File number LR64026)
- RoHS compliant since date code: 0433A
Please see page 5 for more information



■ ORDERING INFORMATION

[Example] FBR211 (a) (b) (c) D012 (e) – P 2 (-CSA)
(a) (b) (c) (d) (e) – (f) (g) (h)

(a)	Series Name	FBR211
(b)	Enclosure	S: Flux free type N: Plastic sealed type
(c)	Coil Power and Schematics	A: Standard A type } (nominal power 0.45 W type) B: Standard B type } C: High sensitivity C type } (nominal power 0.2 W type) E: High sensitivity E type }
(d)	Nominal Voltage	(Example) D003: 3 VDC D012: 12 VDC (refer to the COIL DATA CHART)
(e)	UL Standard	Nil : Standard U : UL114 recognized
(f)	Contact Material	P : Gold-overlay silver-palladium M : Gold-overlay silver
(g)	Special Type	Nil : Standard 2 : High dielectric strength type
(h)	CSA Standard	Nil : Standard -CSA : UL114 + CSA recognized (e) is U

Note: The designation name is stamped on the top of the relay case as follows:

(Example) Designation ordered: FBR211SAD005-P

Stamp: 211SAD005-P

■ SAFETY STANDARD AND FILE NUMBERS

UL114 (File No. E63615)

C22.2 No. 14 (File No. LR40304 or LR64026)

Nominal voltage	Contact rating
1.5 to 24 VDC	1 A 28 VDC resistive 0.5 A 30 VAC resistive

■ SPECIFICATIONS

Item		Standard (A or B type)	High sensitive (C or E type)
Contact	Arrangement	1 form C (SPDT)	
	Material	Gold-overlay silver-palladium or gold-overlay silver	
	Resistance (initial)	Maximum 100 mΩ (at 0.1 A 6 VDC)	
	Rating (resistive)	0.5 A 120 VAC or 1 A 28 VDC	
	Maximum Carrying Current	2 A	
	Maximum Switching Power	60 VA or 28 W	
	Max. Switching Voltage*1	220 VAC or 150 VDC	
	Maximum Switching Current	1.25 A (AC) or 2 A (DC)	
	Minimum Switching load*2 (reference)	Plastic sealed 1 mA 1 Flux free 1 mA 5	
Coil	Nominal Power (at 20°C)	Approximately 0.45 W	Approximately 0.2 W
	Operate Power (at 20°C)	Approximately 0.315 W maximum	Approximately 0.14 W maximum
	Operating Temperature	−25°C to +55°C (no frost)	−25°C to +75°C (no frost)
	Operating Humidity	45 to 85%RH	
Time Value	Operate (at nominal voltage)	Maximum 5 ms	
	Release (at nominal voltage)	Maximum 5 ms	
Insulation	Resistance (initial)	Minimum 100 MΩ (at 500 VDC)	
	Dielectric Strength	500 VAC 1 minute (standard) 1,000 VAC 1 minute (high dielectric strength type)	
		500 VAC 1 minute	
Life	Mechanical	5 × 10 ⁶ operations minimum	
	Electrical (Refer to the REFERENCE DATA)	3 × 10 ⁵ operations minimum (at 1 A/ 28 VDC resistive load) 1 × 10 ⁵ operations minimum (at 2 A/ 12 VDC resistive load) 1 × 10 ⁵ operations minimum (at 0.5 A/120 VDC resistive load)	
Other	Vibration Resistance	10 to 55 Hz (double amplitude of 1.5 mm)	
	Shock Resistance	100 m/s ² (11±1 ms)	60 m/s ² (11±1 ms)
		Endurance	1,000 m/s ² (11±1 ms)
	Weight	Approximately 4 g	

*1 If the switching voltage exceeds the rated contact voltage, reduce the current. The current values vary according to the type of load.

*2 Values when switching a resistive load at normal room temperature and humidity and in a clean environment. The minimum switching load varies with the switching frequency and operation environment.

FBR211 SERIES

■ COIL DATA CHART

1. STANDARD (A or B type)

MODEL				Nominal voltage	Coil resistance ($\pm 10\%$)	Nominal current (at nominal voltage) approx.	Must operate voltage	Must release voltage	Maximum allowable voltage	Nominal power	Coil temperature rise
A type		B type									
Flux free	Plastic sealed	Flux free	Plastic sealed								
FBR211SAD001-□	FBR211NAD001-□	FBR211SBD001-□	FBR211NBD001-□	1.5 VDC	5 Ω	300 mA	70% max. of nominal voltage	10% min. of nominal voltage	150% of nominal voltage	Approx. 450 mW (at nominal voltage)	Approx. 45 deg (at nominal voltage)
FBR211SAD003-□	FBR211NAD003-□	FBR211SBD003-□	FBR211NBD003-□	3 VDC	20 Ω	150 mA					
FBR211SAD005-□	FBR211NAD005-□	FBR211SBD005-□	FBR211NBD005-□	5 VDC	56 Ω	89 mA					
FBR211SAD006-□	FBR211NAD006-□	FBR211SBD006-□	FBR211NBD006-□	6 VDC	80 Ω	75 mA					
FBR211SAD009-□	FBR211NAD009-□	FBR211SBD009-□	FBR211NBD009-□	9 VDC	180 Ω	50 mA					
FBR211SAD012-□	FBR211NAD012-□	FBR211SBD012-□	FBR211NBD012-□	12 VDC	320 Ω	38 mA					
FBR211SAD024-□	FBR211NAD024-□	FBR211SBD024-□	FBR211NBD024-□	24 VDC	1,280 Ω	19 mA					

Note: All values in the table are measured at 20°C.


2. HIGH SENSITIVITY (C or E type)

MODEL				Nominal voltage	Coil resistance ($\pm 10\%$)	Nominal current (at nominal voltage) approx.	Must operate voltage	Must release voltage	Maximum allowable voltage	Nominal power	Coil temperature rise
C type		E type									
Flux free	Plastic sealed	Flux free	Plastic sealed								
FBR211SCD001-□	FBR211NCD001-□	FBR211SED001-□	FBR211NED001-□	1.5 VDC	12 Ω	125 mA	70% max. of nominal voltage	10% min. of nominal voltage	225% of nominal voltage	Approx. 200 mW (at nominal voltage)	Approx. 25 deg (at nominal voltage)
FBR211SCD003-□	FBR211NCD003-□	FBR211SED003-□	FBR211NED003-□	3 VDC	45 Ω	67 mA					
FBR211SCD005-□	FBR211NCD005-□	FBR211SED005-□	FBR211NED005-□	5 VDC	120 Ω	42 mA					
FBR211SCD006-□	FBR211NCD006-□	FBR211SED006-□	FBR211NED006-□	6 VDC	180 Ω	33 mA					
FBR211SCD009-□	FBR211NCD009-□	FBR211SED009-□	FBR211NED009-□	9 VDC	400 Ω	23 mA					
FBR211SCD012-□	FBR211NCD012-□	FBR211SED012-□	FBR211NED012-□	12 VDC	700 Ω	17 mA					
FBR211SCD024-□	FBR211NCD024-□	FBR211SED024-□	FBR211NED024-□	24 VDC	2,800 Ω	9 mA					


Note: All values in the table are measured at 20°C.

■ CHARACTERISTIC DATA


Range of operation temperature and voltage (Standard 0.45 W type)

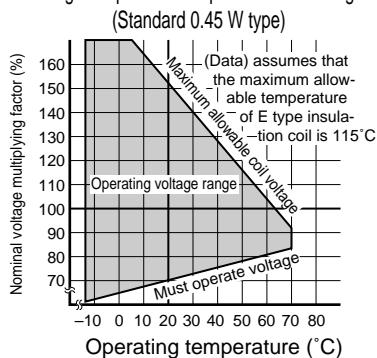


Coil temperature rise data

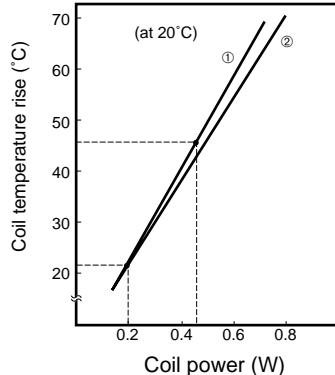


Range of operation temperature and voltage (high sensitive 0.2 W type)

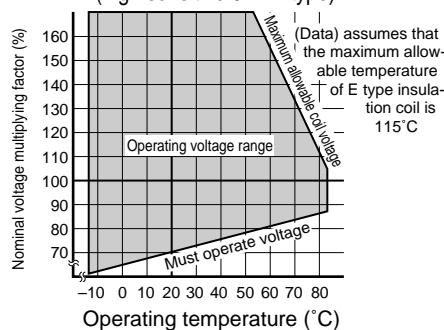


Maximum switching capacity

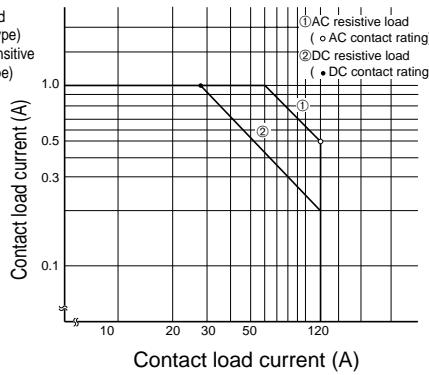

Operate and release time data

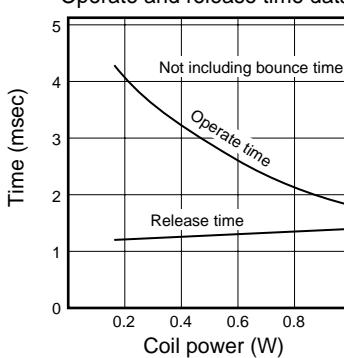


Life curve

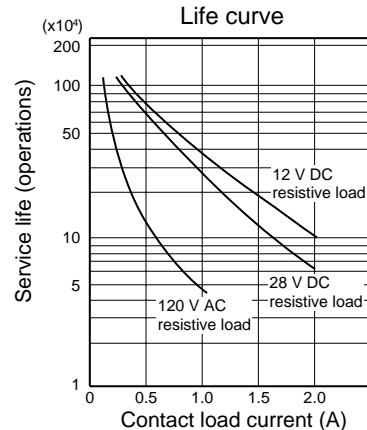


■ REFERENCE DATA


Distribution of operate and release voltage

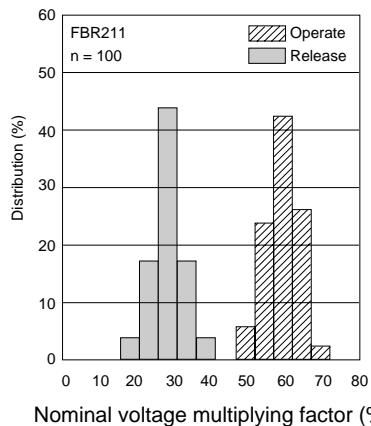

Distribution of operate and release time

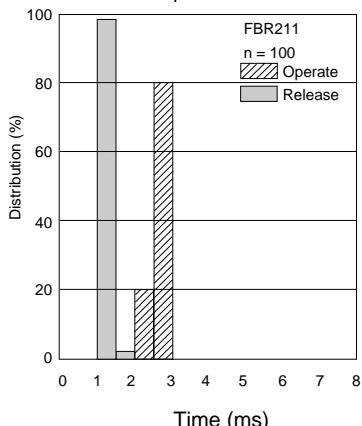


Distribution of contact resistance

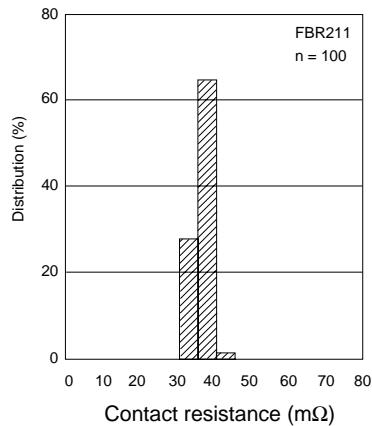

■ DIMENSIONS


1. STANDARD (Flux free type)

● Dimensions

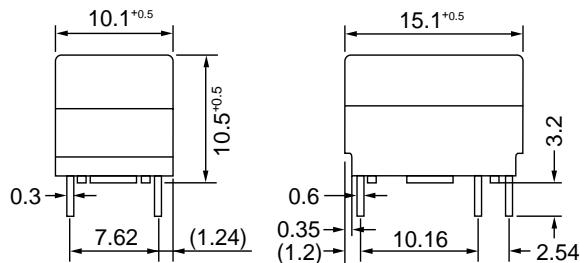


● Schematics (BOTTOM VIEW)

(A type or C type)




(B type or E type)




2. N-TYPE (Plastic sealed type)

● Dimensions

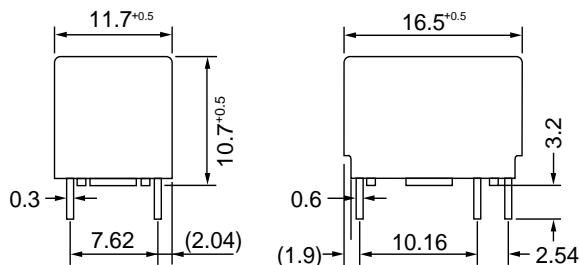


● Schematics (BOTTOM VIEW)

(A type or C type)




(B type or E type)



3. PC BOARD MOUNTING HOLE LAYOUT

● PC board mounting hole layout (BOTTOM VIEW)



Unit: mm

RoHS Compliance and Lead Free Relay Information


1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info.
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu. From February 2005 forward Sn-3.0Cu-Ni will be used for FTRB3 and FTR-B4 series relays.
- Most signal and some power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 6 hazardous materials that are restricted by RoHS directive (lead, mercury, cadmium, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office. We will ship leaded relays as long as the leaded relay inventory exists.

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu and Sn-3.0 Cu-Ni (only FTR-B3 and FTR-B4 from February 2005)

Reflow Solder condition

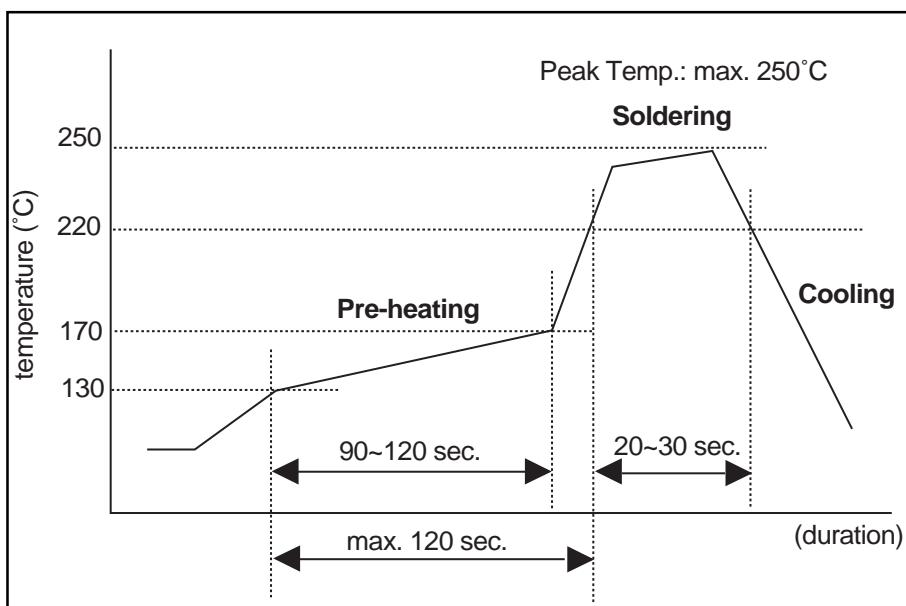

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at 260°C soler bath

Solder by Soldering Iron:

Soldering Iron Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical realys.

4. Tin Whisker

- SnAgCu solder is known as low riskof tin whisker. No considerable length whisker was found by our in-house test.

5. Solid State Relays

- Each lead terminal will be changed from solder plating to Sn plating and Nickel plating. A layer of Nickel plating is between the terminal and the Sn plating to avoid whisker.

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	