



Автомобильные реле серии FBR572, FBR582 Технические характеристики

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	

Единый адрес для всех регионов: fst@nt-rt.ru || www.fujitsu.nt-rt.ru

COMPACT POWER RELAY

1 POLE X 2—12A (28VDC) (FOR 24V BATTERY AUTOMOTIVE APPLICATIONS)

FBR572, 582 SERIES

■ FEATURES

- Two independent relays mounted in a single package (43% of the volume of the two FRL-270 relays)
- High current contact capacity (carrying current: 40 A/2 minutes, 30 A/1 hour)
- Suitable for controlling 24 V motors in trucks and other large vehicles
- High heat resistance and extended operating voltage
- Two types of contact gap (FBR572: 0.8 mm, FBR582: 1.4 mm)



■ ORDERING INFORMATION

[Example] $\frac{\text{FBR572}}{\text{(a)}} \frac{\text{N}}{\text{(b)}} \frac{\text{D24}}{\text{(c)}} - \frac{\text{W}}{\text{(d)}} \frac{\text{**}}{\text{(e)}}$

(a)	Series Name	FBR572: FBR572 Series relay (contact gap 0.8 mm) FBR582: FBR582 Series relay (contact gap 1.4 mm)
(b)	Structure	N : Plastic sealed type
(c)	Nominal Voltage	D24 : 24 VDC
(d)	Contact Material	W : Silver-tin oxide indium Y : Silver-tin oxide N : Silver copper nickel
(e)	Custom Designation	To be assigned custom specification

FBR572, 582 SERIES

■ SPECIFICATIONS

Item		FBR570 Series	FBR580 Series
Contact	Arrangement	1 form C × 2 (SPDT ×2)	
	Material	Silver-tin oxide indium (-W type) Silver copper nickel (-N type)	Silver-tin oxide indium (-W type) Silver-tin oxide (-Y type)
	Voltage Drop (Resistance)	Maximum 100 mV (at 12 VDC 2 A)	
	Ratings	28 VDC 12 A (locked motor load) 28 VDC inrush 15 A, break 2.5 A (motor free load)	
	Maximum Carrying Current	40 A/2 minutes, 30 A/ 1 hour (25°C, 100% rated coil voltage)	
	Maximum Inrush Current (Reference)	-W,-Y type: 60 A -N type: 40 A	
	Max. Switching Current (Reference)	12 A 28 VDC	14 A 32 VDC
	Minimum Switching Load*1 (Reference)	-W, -Y Type: 6 VDC 1 A -N Type: 6 VDC 2 A	
Coil	Operating Temperature	-40°C to +85°C (no frost)	
	Storage Temperature	-40°C to +100°C (no frost)	
Time Value	Operate (at nominal voltage)	Maximum 10 ms	
	Release (at nominal voltage)	Maximum 5 ms	
Life	Mechanical	1 × 10 ⁷ operations minimum	1 × 10 ⁶ operations minimum
	Electrical	1 × 10 ⁵ operations minimum (locked motor load) 5 × 10 ⁵ operations minimum (motor free load)	1 × 10 ⁵ operations minimum (locked motor load)
Other	Vibration Resistance	10 to 55 Hz (double amplitude of 1.5 mm)	
	Shock Resistance	Misoperation	100 m/s ²
		Endurance	1,000 m/s ²
	Weight	Approximately 18 g	

*1 Values when switching a resistive load at normal room temperature and humidity, and in a clean environment. The minimum switching load varies with the switching frequency and operating environment.


■ COIL DATA CHART

ORDERING CODE	Rated coil voltage	Coil resistance (±10%)	Must operate voltage	Thermal resistance
FBR572ND24-W FBR572ND24-N	24 VDC	384 Ω	14.4 VDC (at 20°C)	67°C/W
FBR582ND24-W FBR582ND24-Y		170 Ω	18.0 VDC (at 85°C)	56°C/W

FBR572, 582 SERIES


■ SUITABLE APPLICATIONS

Application	Normal load current	Life x 10 ³	Recommended model (example)
Power Windows	10 to 12 A (switching at motor locking)	100	FBR572ND24-W
Automatic Door Lock	5 A/2 door (switching at motor locking)	100	FBR572ND24-W
Intermittent Wipers	INRUSH 15 to 30 A BREAK 2 to 8 (motor free)	300	FBR572ND24-W
			FBR572ND24-N




■ CHARACTERISTIC DATA

1. MAXIMUM BREAK CAPACITY

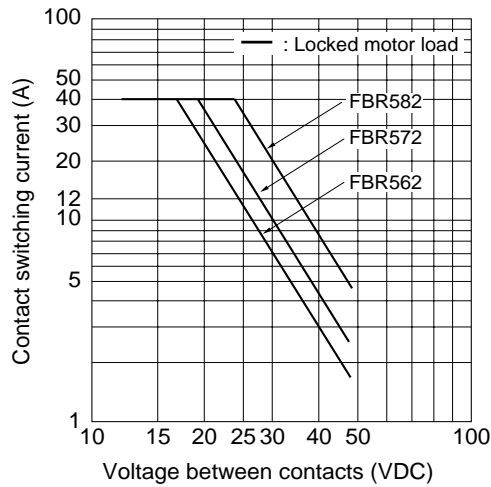

• Test circuit

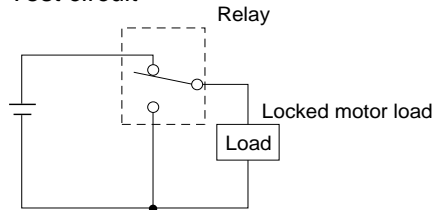


FBR572, 582 SERIES

2. LIFE TEST (EXAMPLE)


[FBR572 type]

- Test item
28 VDC-12 A
Motor lock
100,000 operations minimum
(FBR572 □-W type)


• Test circuit




• Current wave form



• Shift of pick-up drop-out voltage

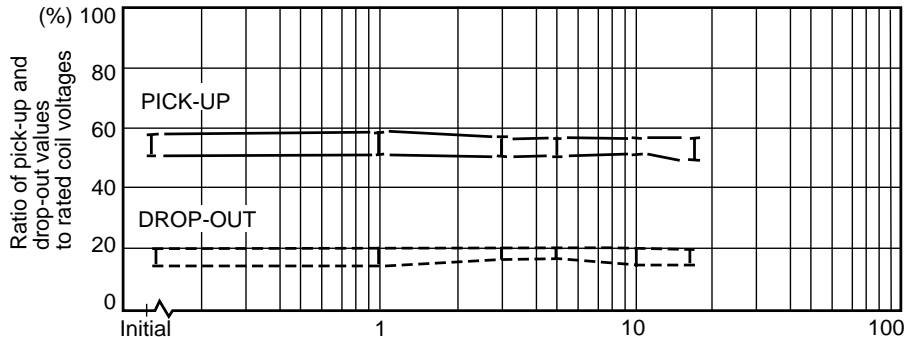


• Shift of contact resistance

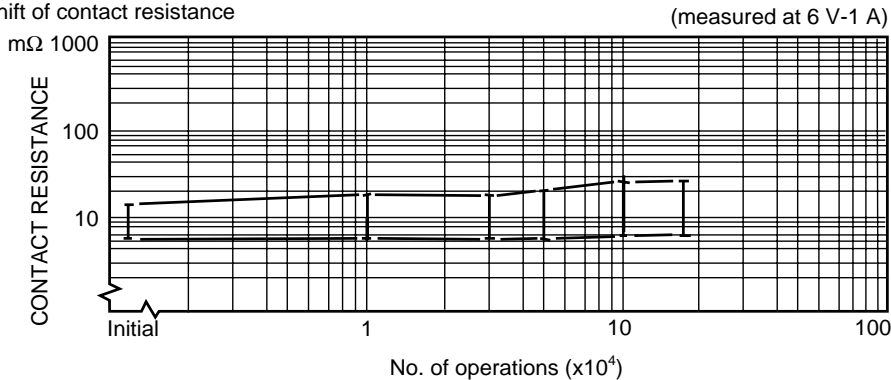


[FBR582 type]

- Test item
28 VDC-12 A
Motor lock
100,000 operations minimum
(FBR582 □-W type)


• Test circuit




• Current wave form



• Shift of pick-up drop-out voltage

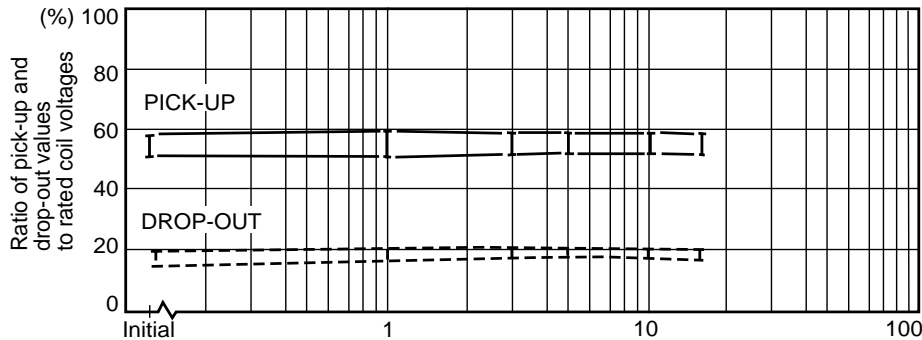


• Shift of contact resistance

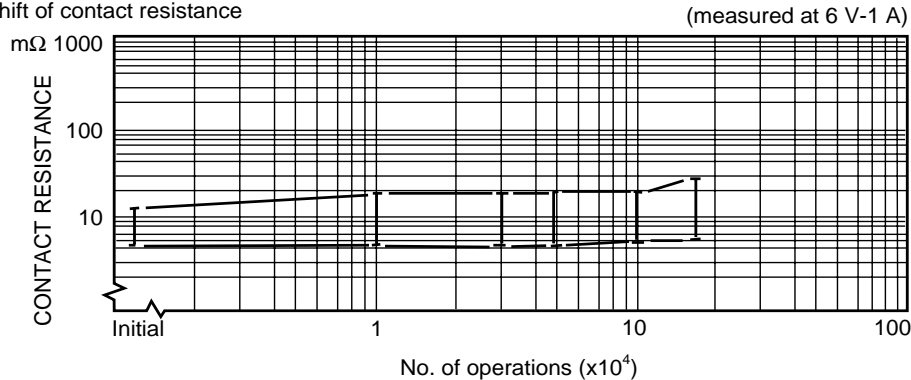


FBR572, 582 SERIES

3. OPERATING COIL VOLTAGE RANGE


[FBR572 type]

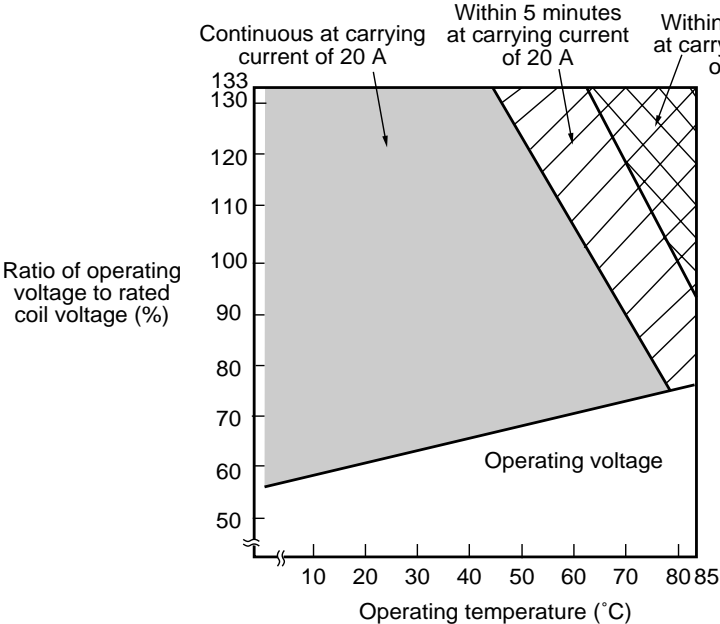

[FBR582 type]

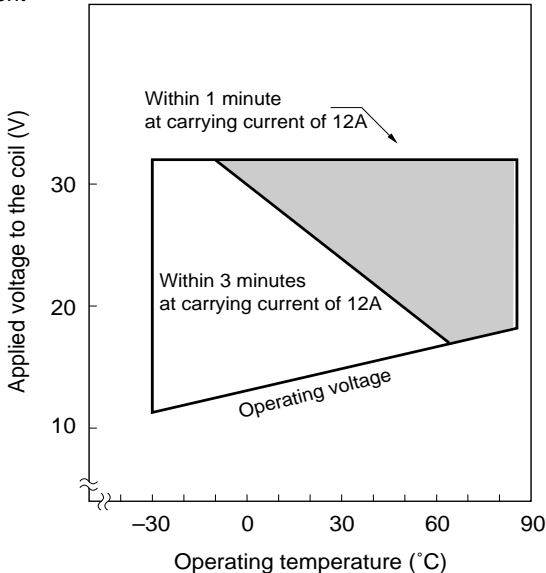


4. VIBRATION RESISTANCE CHARACTERISTICS

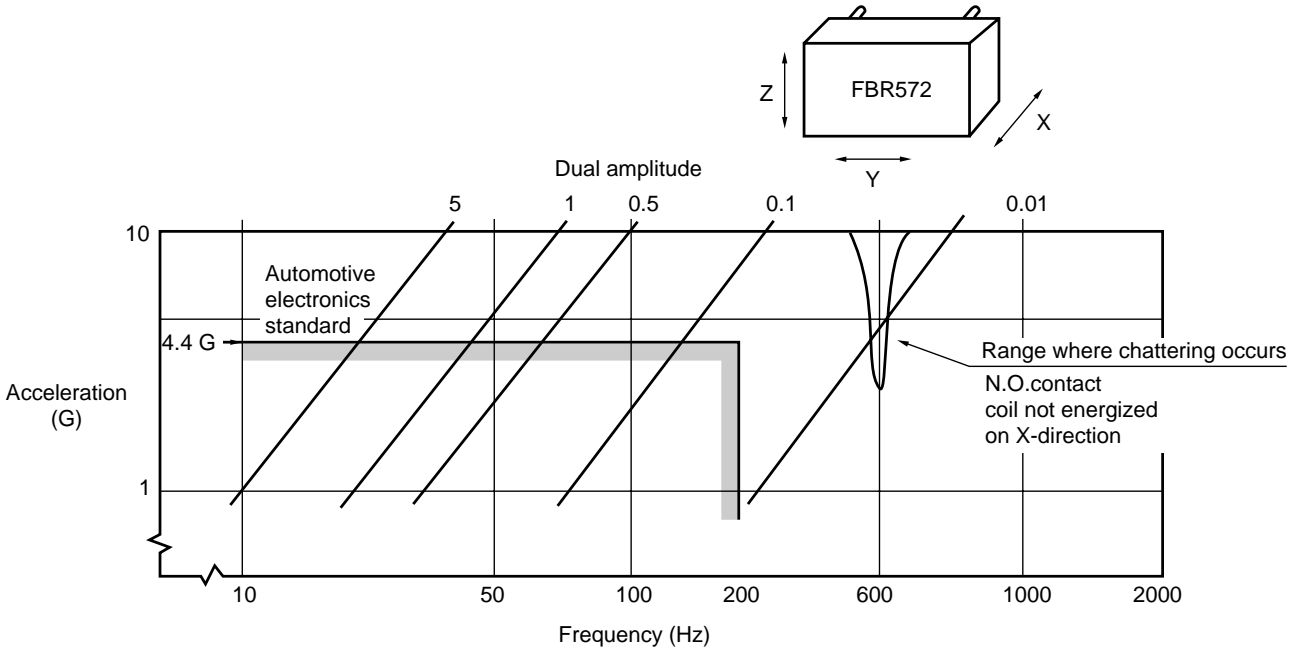


FBR572, 582 SERIES

5. SHOCK RESISTANCE CHARACTERISTICS

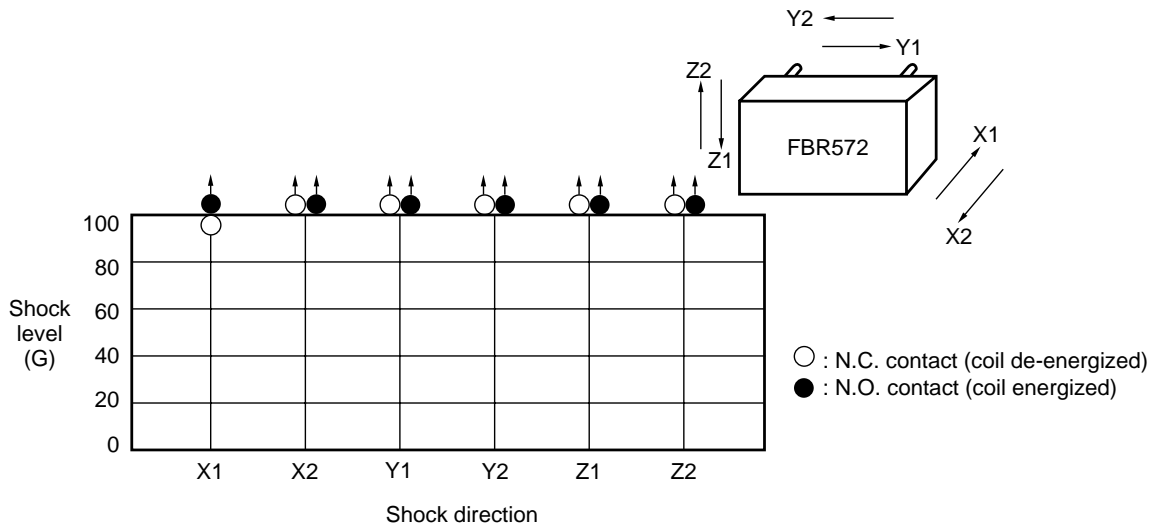


■ REFERENCE DATA

[FBR572 type]

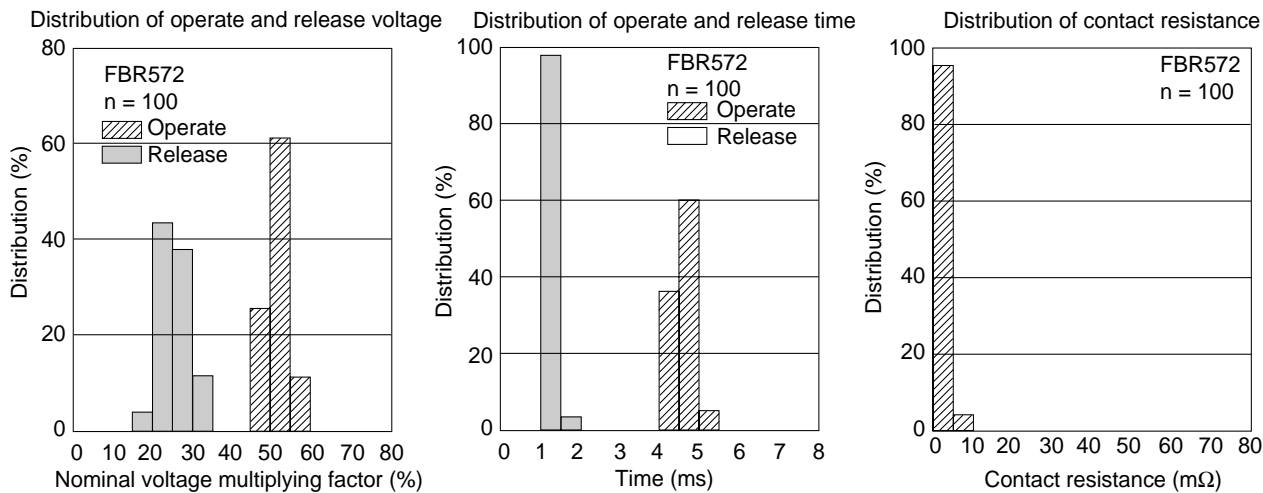

[FBR582 type]

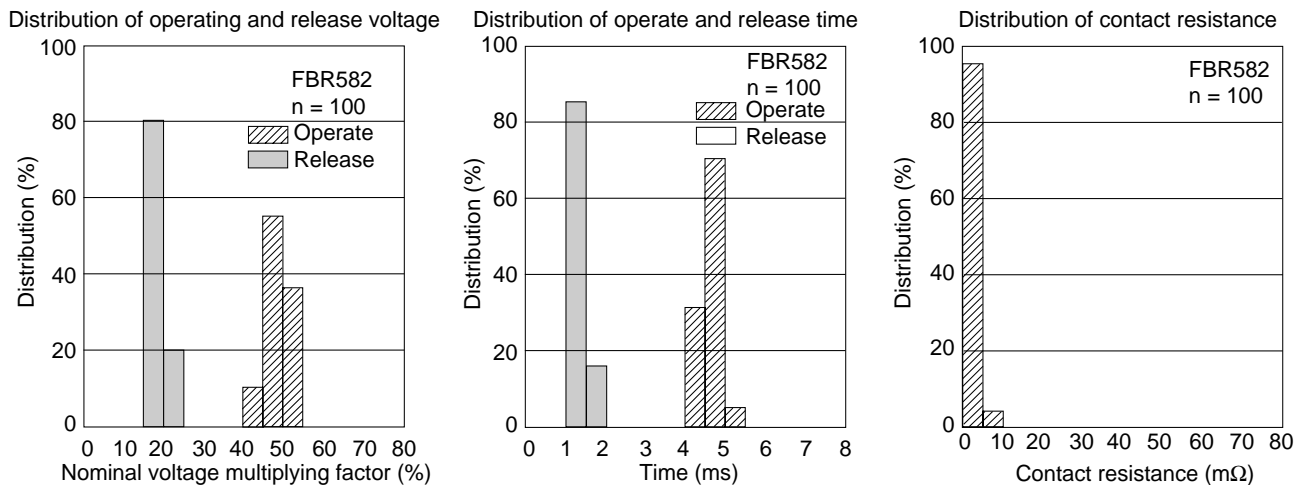


FBR572, 582 SERIES


■ DIMENSIONS

[FBR572 type]


● Dimensions

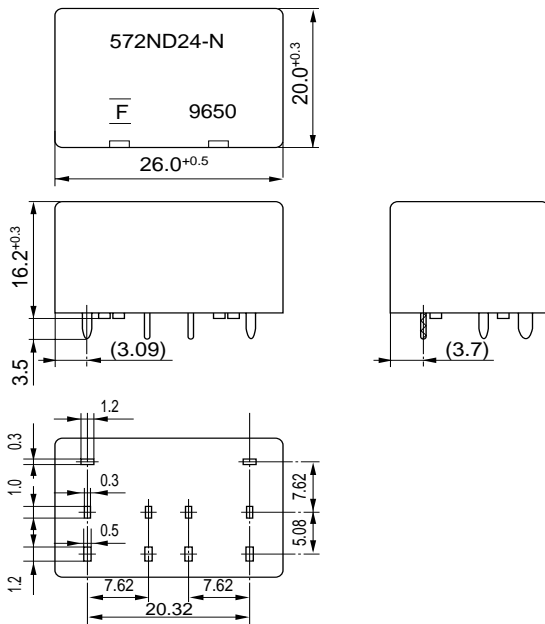


● PC board mounting hole layout (BOTTOM VIEW)

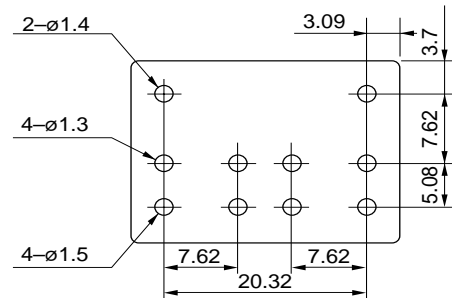

● Schematic (BOTTOM VIEW)



● Tube carrier

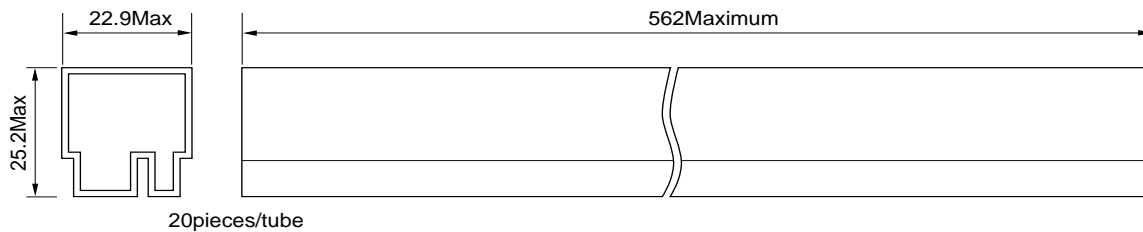


Unit: mm

FBR572, 582 SERIES


■ DIMENSIONS

[FBR582 type]


● Dimension

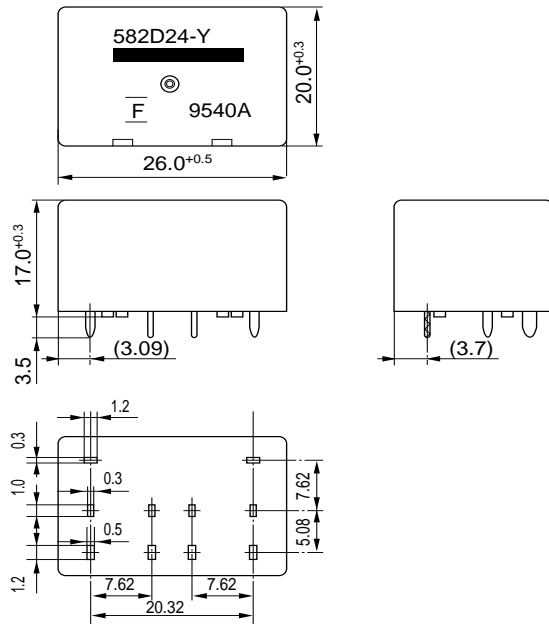


● PC board mounting hole layout (BOTTOM VIEW)

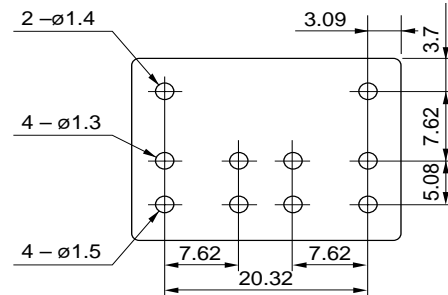

● Schematic (BOTTOM VIEW)



● Tube carrier

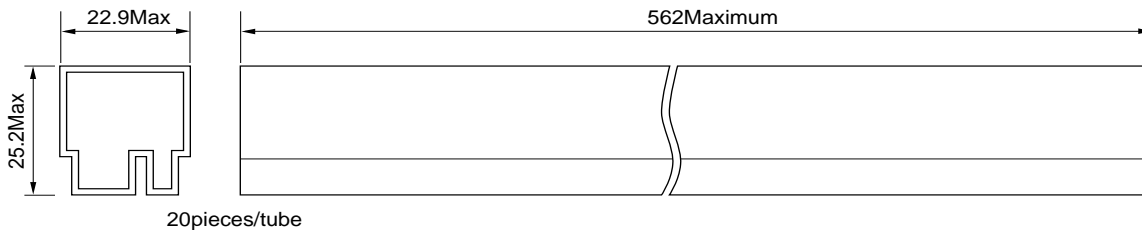

Unit: mm

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	