



# Низковольтные термопечатающие механизмы FTP-62DMCL101/111

## Технические характеристики

<b>Архангельск</b> (8182)63-90-72	<b>Ижевск</b> (3412)26-03-58	<b>Магнитогорск</b> (3519)55-03-13	<b>Пермь</b> (342)205-81-47	<b>Сургут</b> (3462)77-98-35
<b>Астана</b> (7172)727-132	<b>Иркутск</b> (395)279-98-46	<b>Москва</b> (495)268-04-70	<b>Ростов-на-Дону</b> (863)308-18-15	<b>Тверь</b> (4822)63-31-35
<b>Астрахань</b> (8512)99-46-04	<b>Казань</b> (843)206-01-48	<b>Мурманск</b> (8152)59-64-93	<b>Рязань</b> (4912)46-61-64	<b>Томск</b> (3822)98-41-53
<b>Барнаул</b> (3852)73-04-60	<b>Калининград</b> (4012)72-03-81	<b>Набережные Челны</b> (8552)20-53-41	<b>Самара</b> (846)206-03-16	<b>Тула</b> (4872)74-02-29
<b>Белгород</b> (4722)40-23-64	<b>Калуга</b> (4842)92-23-67	<b>Нижний Новгород</b> (831)429-08-12	<b>Санкт-Петербург</b> (812)309-46-40	<b>Тюмень</b> (3452)66-21-18
<b>Брянск</b> (4832)59-03-52	<b>Кемерово</b> (3842)65-04-62	<b>Новокузнецк</b> (3843)20-46-81	<b>Саратов</b> (845)249-38-78	<b>Ульяновск</b> (8422)24-23-59
<b>Владивосток</b> (423)249-28-31	<b>Киров</b> (8332)68-02-04	<b>Новосибирск</b> (383)227-86-73	<b>Севастополь</b> (8692)22-31-93	<b>Уфа</b> (347)229-48-12
<b>Волгоград</b> (844)278-03-48	<b>Краснодар</b> (861)203-40-90	<b>Омск</b> (3812)21-46-40	<b>Симферополь</b> (3652)67-13-56	<b>Хабаровск</b> (4212)92-98-04
<b>Вологда</b> (8172)26-41-59	<b>Красноярск</b> (391)204-63-61	<b>Орел</b> (4862)44-53-42	<b>Смоленск</b> (4812)29-41-54	<b>Челябинск</b> (351)202-03-61
<b>Воронеж</b> (473)204-51-73	<b>Курск</b> (4712)77-13-04	<b>Оренбург</b> (3532)37-68-04	<b>Сочи</b> (862)225-72-31	<b>Череповец</b> (8202)49-02-64
<b>Екатеринбург</b> (343)384-55-89	<b>Липецк</b> (4742)52-20-81	<b>Пенза</b> (8412)22-31-16	<b>Ставрополь</b> (8652)20-65-13	<b>Ярославль</b> (4852)69-52-93
<b>Иваново</b> (4932)77-34-06	<b>Киргизия</b> (996)312-96-26-47	<b>Казахстан</b> (772)734-952-31	<b>Таджикистан</b> (992)427-82-92-69	

Единый адрес для всех регионов: [fst@nt-rt.ru](mailto:fst@nt-rt.ru) || [www.fujitsu.nt-rt.ru](http://www.fujitsu.nt-rt.ru)

*DISCONTINUED*

## **BATTERY DRIVE, FTP-60D Series 2" HIGH SPEED THERMAL PRINTER**

### **FTP-62DMCL101/111, Easy Loading Method**

#### ■ OVERVIEW

The easy loading FTP-60D MCL Series is ultra compact high speed, battery driven thermal printer, printing on 2-inch wide paper (58mm) where platens are removable. Our original platen removal mechanism improved paper loading and maintenance.

The FTP-60D MCL series can be used for a variety of applications, such as portable terminals, POS, banking terminals, and measurement and medical equipment.



FTP-62D series

#### ■ HIGHLIGHTS

- **Easy loading type**  
Our unique platen removal mechanism improved paper loading and maintenance
- **Ultra compact**  
Height 19 mm, width 69.5 mm, depth 46 mm for the 2 inch model
- **High speed printing**  
Print at 100mm/s (at 9.5VDC) maximum (FTP-62DMCL101)  
Print at 75mm/s (at 7.2 VDC) maximum (FTP-62DMCL111)
- **High resolution printing**  
8 dots/mm of resolution printing is possible
- **RoHS compliant**

# FTP-62DMCL101/111

## ■ PART NUMBERS

Item		Part number
Printers		FTP-62DMCL101 (FPC length 38mm) without platen open detect switch FTP-62DMCL111 (FPC length 65mm) without platen switch
LSI for driving		FTP-62DCUxxx
Interface boards	Serial	FTP-62DDSLxxx (RS 232C)
	USB	FTP-62DDSLxxx (V2.0)
	USB/RS-232C	FTP-62DDS001-R
Interface cables	Parallel	FTP-628Y202
	Serial	FTP-628Y302
	USB	FTP-628Y301
Power cable (head, motor, logic)		FTP-628Y402
Platen replacement		FTP-62DMP0221

## ■ SPECIFICATIONS

Item		Specifications
Part number		FTP-62DMCL101/111
Printing method		Thermal-line dot method
Dot structure		384 dots/line
Dot pitch (Horizontal)		0.125 mm (8 dots/mm)—Dot density
Dot pitch (Vertical)		0.125 mm (8 dots/mm)—Line feed pitch
Effective printing area		48 mm
Number of columns		ANK 32 columns/line (maximum 12x 24 dot font)
Paper width		58 mm <sup>+0</sup> <sub>-1</sub>
Paper thickness		60 to 85 μ m (some paper in this range may not be used because of paper characteristics)
Printing Speed	MCL101	Maximum 100mm/sec. (800 dot line/sec.) at 9.5V
	MCL111	Maximum 75mm/sec. (600 dot line/sec.) at 7.2V
Character types		Alphanumeric, katakana: 159 types International and special characters: 195 types JIS Kanji level 1, level 2, non-Kanji (supported only when Kanji CG is mounted): about 6800 types
Character, dimensions (H×W), number of columns		12 × 24 dots, (1.5 × 3.0mm), 32 columns: ANK 24 × 24 dots, (3.0 × 3.0mm), 16 columns: ANK, Kanji 8 × 16 dots, (1.0 × 2.0 mm), 48 columns: ANK 16 × 16 dots, (2.0 × 2.0 mm), 24 columns: ANK, Kanji

# FTP-62DMCL101/111

## ■ SPECIFICATIONS

Item		Specification	
		FTP-62DMCL101/111	
Interface		Conforms to RS232C / USB	
Operating Voltage	For print head	MCL101/111	4.2 VDC to 9.5 V, average current 0.87A (0.93), peak value Printing ratio: 12.5%, printing speed 75mm/sec. at 7.2 V
	For motor	MCL101/111	4.2 to 9.5VDC, 1A maximum
	For logic	MCL101/111	3.0 to 5.25VDC, 0.1 A maximum
Dimensions	Printer mechanism	69.5 x 46 x 19mm (WxDxH)	
	Interface board	40 x 41mm	
Weight	Printer mechanism	Approximately 29g	
	Interface board	TBA	
Head life		Pulse resistance: 100 million pulses/dot (under our standard conditions). Abrasion resistance: paper traveling distance 50km (print ratio: 25% or less)	
Operating environment	Operating temperature*	0°C to +50°C	
	Operating humidity	20 to 85% RH (no condensation)	
	Storage temperature	-20°C to +60°C (paper not included)	
	Storage humidity	5 to 95% RH (no condensation)	
Detection function	Head temperature detection	Detected by thermistor	
	Paper out/mark detection	Detected by photo-interrupter	
Recommended thermal sensitive paper		High sensitive paper:	TF60KS-E4 (Nippon Paper)
		Standard paper:	TK50KS-E (Nippon Paper) PD150R (Oji Paper) FTP-020P0701 (58mm)
		Medium life storage paper:	TK60KS-F1 (Nippon Paper) FTP-020P0704 (58mm) PD170R (Oji Paper) P220VBB-1 (Mitsubishi Paper)
		Long life storage paper:	PD160R-N (Oji Paper) AFP-235 (Mitsubishi Paper) TP50KJ-R (Nippon Paper) HA220AA (Nippon Paper)

\*+5°C to +40°C printing density assurance range (-25 to 70°C capability)


# FTP-62DMCL101/111

## FUNCTION

Item	Item
1. Test print function	8. Mark detection function
2. Paper out detection	9. MCU operation abnormality detection
3. Paper near end detection	10. Power ON/OFF sequence protection
4. Thermal head temperature abnormality detection	11. Motor over-current protection
5. Blow-out fuse detection	12. Hardware timer
6. Head voltage abnormality detection	
7. Motor power saving function	

## DIMENSIONS

### 1. Printer mechanism: 2- inch

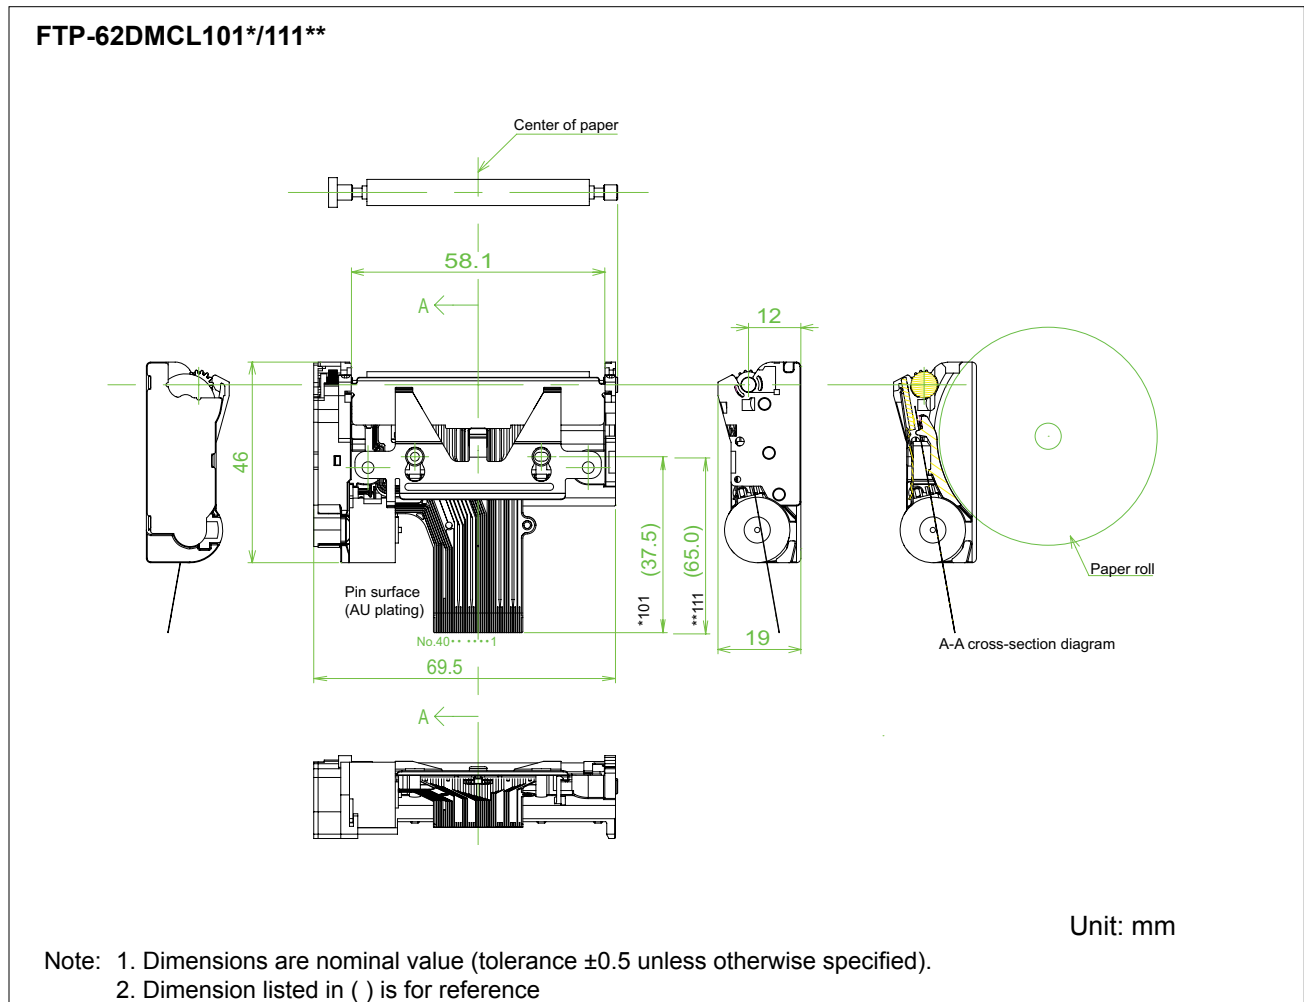

# FTP-62DMCL101/111

## ■ PRINTER CONNECTOR (FLEXIBLE PT BOARD) PIN ARRAYS

### FTP-62DMCL101/111

Thermal head, control circuit side connector: 54104-4031 Molex or equivalent product

No.	Symbol	I/O	Signal Name
1	N.C.	-	No connection
2	N.C	-	
3	VH	I	Head drive power
4	VH	I	
5	VH	I	
6	VH	I	
7	DI	I	Data in
8	CLK	I	Clock
9	GND	-	Head ground
10	GND	-	
11	GND	-	
12	GND	-	
13	STB6	I	Strobe 6
14	STB5	I	Strobe 5
15	STB4	I	Strobe 4
16	Vdd	I	Logic power
17	TM	O	Thermistor
18	TM	O	
19	STB3	I	Strobe 3
20	STB2	I	Strobe 2
21	STB1	I	Strobe 1
23	GND	-	Head ground
24	GND	-	
25	GND	-	
26	/LAT	I	/ Data latch
27	DO	O	Data out
28	VH	I	Head drive power
29	VH	I	
30	VH	I	
31	VH	I	
32	N.C.	-	No connection
33	PHK	-	Cathode for photo interrupter
34	VSEN	I	Paper sensor power
35	PHE	O	Emittor for photo interruptor
36	N.C.	-	No connection
37	MT /A	I	Excitation signal A
38	MT / $\bar{A}$	I	Excitation signal $\bar{A}$
39	MT /B	I	Excitation signal B
40	MT / $\bar{B}$	I	Excitation signal $\bar{B}$

Do not plug or unplug the FPC when power is on.

<b>Архангельск (8182)63-90-72</b>	<b>Ижевск (3412)26-03-58</b>	<b>Магнитогорск (3519)55-03-13</b>	<b>Пермь (342)205-81-47</b>	<b>Сургут (3462)77-98-35</b>
<b>Астана (7172)727-132</b>	<b>Иркутск (395)279-98-46</b>	<b>Москва (495)268-04-70</b>	<b>Ростов-на-Дону (863)308-18-15</b>	<b>Тверь (4822)63-31-35</b>
<b>Астрахань (8512)99-46-04</b>	<b>Казань (843)206-01-48</b>	<b>Мурманск (8152)59-64-93</b>	<b>Рязань (4912)46-61-64</b>	<b>Томск (3822)98-41-53</b>
<b>Барнаул (3852)73-04-60</b>	<b>Калининград (4012)72-03-81</b>	<b>Набережные Челны (8552)20-53-41</b>	<b>Самара (846)206-03-16</b>	<b>Тула (4872)74-02-29</b>
<b>Белгород (4722)40-23-64</b>	<b>Калуга (4842)92-23-67</b>	<b>Нижний Новгород (831)429-08-12</b>	<b>Санкт-Петербург (812)309-46-40</b>	<b>Тюмень (3452)66-21-18</b>
<b>Брянск (4832)59-03-52</b>	<b>Кемерово (3842)65-04-62</b>	<b>Новокузнецк (3843)20-46-81</b>	<b>Саратов (845)249-38-78</b>	<b>Ульяновск (8422)24-23-59</b>
<b>Владивосток (423)249-28-31</b>	<b>Киров (8332)68-02-04</b>	<b>Новосибирск (383)227-86-73</b>	<b>Севастополь (8692)22-31-93</b>	<b>Уфа (347)229-48-12</b>
<b>Волгоград (844)278-03-48</b>	<b>Краснодар (861)203-40-90</b>	<b>Омск (3812)21-46-40</b>	<b>Симферополь (3652)67-13-56</b>	<b>Хабаровск (4212)92-98-04</b>
<b>Вологда (8172)26-41-59</b>	<b>Красноярск (391)204-63-61</b>	<b>Орел (4862)44-53-42</b>	<b>Смоленск (4812)29-41-54</b>	<b>Челябинск (351)202-03-61</b>
<b>Воронеж (473)204-51-73</b>	<b>Курск (4712)77-13-04</b>	<b>Оренбург (3532)37-68-04</b>	<b>Сочи (862)225-72-31</b>	<b>Череповец (8202)49-02-64</b>
<b>Екатеринбург (343)384-55-89</b>	<b>Липецк (4742)52-20-81</b>	<b>Пенза (8412)22-31-16</b>	<b>Ставрополь (8652)20-65-13</b>	<b>Ярославль (4852)69-52-93</b>
<b>Иваново (4932)77-34-06</b>	<b>Киргизия (996)312-96-26-47</b>	<b>Казахстан (772)734-952-31</b>	<b>Таджикистан (992)427-82-92-69</b>	

Единый адрес для всех регионов: [fst@nt-rt.ru](mailto:fst@nt-rt.ru) || [www.fujitsu.nt-rt.ru](http://www.fujitsu.nt-rt.ru)